


WISI DM 35 C

Two-way tap, 20 dB

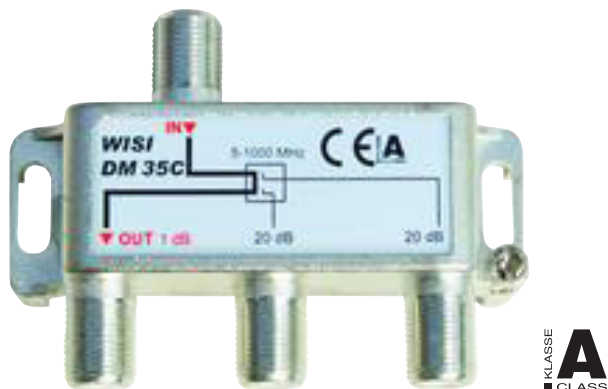

Description

The DM 35 C is a double splitter for cable TV. Its insertion loss is 1.2 dB and its tap loss is 20 dB. High shielding properties (class A) guarantee an interference-free transmission of the signals in the input and distribution systems. A fast and safe connection is ensured through F-sockets. The splitter is also return path compatible and suitable for internal installation.

At a glance:

- Frequency range 5...1000 MHz
- Screening factor according to Class A
- High port isolation and return loss

| Technical data | |
|-------------------------------------|--|
| Frequency range | 5...1006 MHz |
| Through loss | 0,5...1,0 dB |
| TAP loss | 20 dB |
| Directional attenuation | ≥45/≥32 dB (5...470/470...1000 MHz) |
| Isolation | ≥34 dB |
| Return loss | 18...22 dB |
| Connectors | |
| F-female | 4 pcs. (1x input, 1x run through, 2x branch) |
| General data | |
| Screening factor | >85 dB (class A) |
| DC Bypass IN/OUT 1A/30V | No |
| Dimensions (width x height x depth) | 78 x 50 x 27 mm |
| Sales unit | 10 pcs. |
| Dimensions (WxHxD) sales unit | 370 x 320 x 200 mm |
| Packaging volume sales unit | dm ³ |
| Gross weight sales unit | 0.06 kg |
| Shipping unit | 100 pcs. |
| Dimensions (WxHxD) shipping unit | mm |
| Packaging volume shipping package | dm ³ |
| Gross weight shipping unit | 0.06 kg |
| EAN | 4010056703066 |
| Article number | 70306 |
| Customs tariff number | 85437090 |